


END SUCTION CENTRIFUGAL PROCESS PUMPS (Type APP)

Design Features

- Horizontal Centrifugal, Back-Pull-Out type pump fitted with single stage closed Impeller in foot mounted Volute Casing having axial end suction and Vertical centerline delivery.
- Designed to confirm DIN 24256 / ISO 2858 / API 610 (in general).

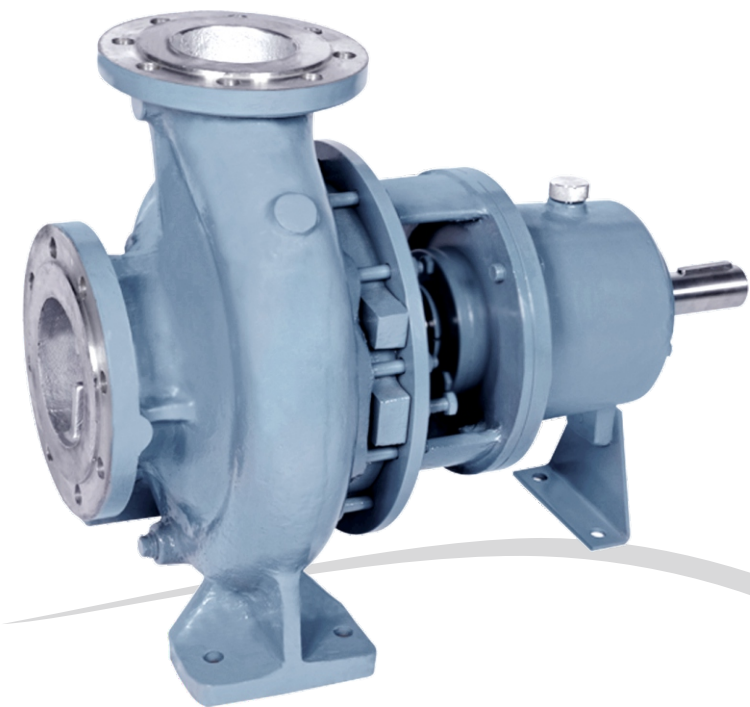

Applications

- To handle Hydrocarbons, Volatile Liquids, Thermic Fluids and Corrosives in Chemical / Petrochemical / Fertilizer / Sugar / Paper and other Process Industries.

Operating Data

	Speed	Head	Discharge
Operating Range	1450 RPM	up to 60 meter	up to 350 m³/hr
	2900 RPM	up to 150 meter	up to 380 m³/hr
Sealing Arrangement	Mechanical Seal / Gland Packing		
Operating Temperature	up to 300° C		
Operational Duty	S1		
M.O.C.	Grey Cast Iron, Bronze, Stainless Steel 316 / 304, Cast Steel, Alloy 20, Ni-Hard Cast Iron		
Custom-built Design	Pumps with different operating speed & temperature can be offered on request.		



Works & Office:
AJAY ENGINEERS

Plot No. : 269, Phase-I, Opp. Road No.: 4, G.I.D.C. Estate, Kathwada, Ahmedabad-382 430. (Guj.) INDIA
Contact : +91 92277 92099, +91 91060 24454
E-mail : contact@ajayengineers.com, sales@ajayengineers.com

Mobile : +91 98251 92099
Website : www.ajayengineers.com